DMX CONTROLLER 16U SLAVE

CONTROLLER

Powerful DMX controller containing 16 DMX Universes at each unit,
RDM function enable monitoring and managing fixture status remotely,
Designed for large lighting system.

RDM

AC-IN

SPECIFICATION

MODEL	DMX CONTROLLER 16U SLAVE
OPERATING VOLTAGE	AC 100–240V
POWER	15W
COMMUNICATION	TCP/IP, UDP
MASTER/SLAVE CONNECTION	RJ45 or SFP
COMPATIBILITY	8 and 16 bit DMX fixtures
CAPABILITY	512/1024CH*16
HOUSING	Aluminum
CONNECTOR	RJ45 Input and 3Pin Connector Output
CONTROL PROTOCOL	DMX512(1990)/DMX512-A/RDM
OPERATING TEMPERATURE	-20°C ~ +45°C
STORAGE TEMPERATURE	-25°C ~ +50°C
WEIGHT	1500g
COLOR	Black/White
WATER PROOF	IP20
DIMENSIONS	482(L)*141(W)*45(H)mm
LIST	CE

ORDER CODE	MODEL		CHANNEL		UNIVERS		POWER		VOLTAGE		COLOR
EXAMPLE	DMX CONTROLLER 16U MASTER	–	512	–	16	–	15	–	220	–	BLACK

*All rights reserved.Specifications may change without prior notice.

DIMENSIONS

Unit: mm

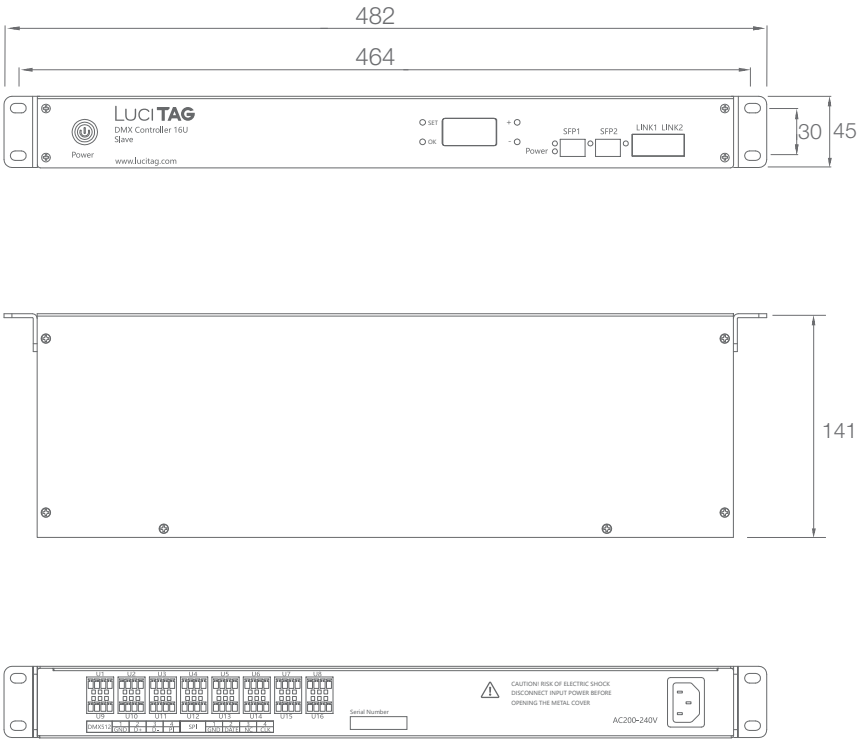

WIRING DIAGRAM

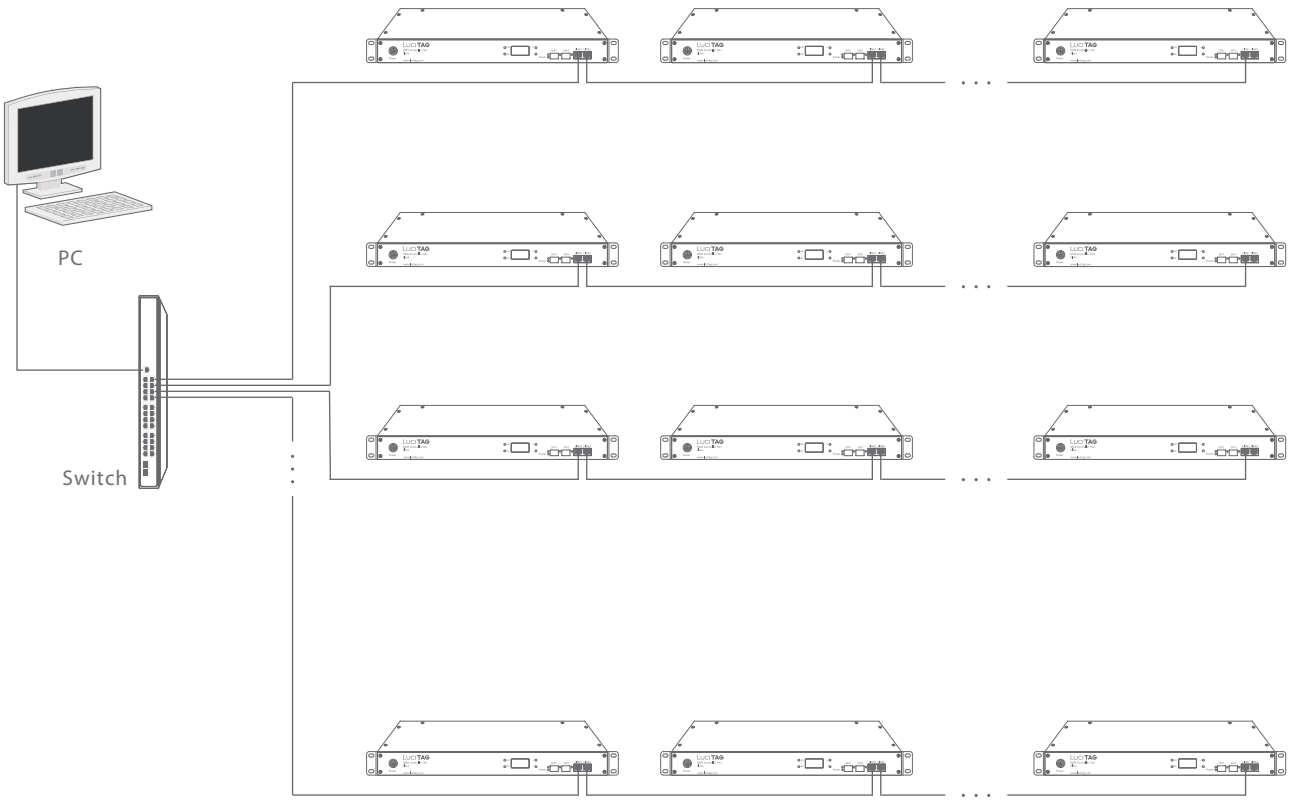

*All rights reserved.Specifications may change without prior notice.