

# ARCHI REACH MINI

IP66 **WASH**

The fixture utilizes the latest ultra narrow beam technology, thus ensuring fixture output is at high intensity while consuming extremely low power,  
 The excellent optic design creates clean illumination and highly efficient light performance,  
 The optic design offers excellent glare control.



-  Dimmable 11000111  
00111111  
01101000  
01011111  
10100000 RDM
-  Adjustable
-  IP67
-  Easy Installation




## SPECIFICATION

MODEL	▶ ARCHI REACH MINI
OPERATING VOLTAGE	▶ 24V DC
POWER CONSUMPTION	▶ 3W, 5W
LED TYPE	▶ High Power LED
COLOR RANGE	▶ 2700K,3000K,4000K,5000K
CRI	▶ 80min, 90min
SYSTEM EFFICIENCY	▶ 63lm/W@3000K
FWHM	▶ 3°, 7°
MATERIAL	▶ Aluminum + Tempered Glass
OPERATING TEMPERATURE	▶ -20°C ~ +55°C
STORAGE TEMPERATURE	▶ -25°C ~ +60°C
LIFE TIME	▶ 50,000 hours/L70 at 25°C
CONNECTION	▶ Quick-Plug
DIMENSIONS	▶ 86(L)*56(W)*110(H)mm (with bracket)(Square) ▶ 86(L)*56(W)*112(H)mm (with bracket)(Round)
CABLE LENGTH	▶ 500mm
WATER PROOF	▶ IP66
CONTROL	▶ ON/OFF, DMX/RDM, 0-10V Dim
LIST	▶ CE

ORDER CODE	MODEL	SHAPE	POWER	CCT	CRI	OPTICS	VOLTAGE	CONTROL	ACC
EXAMPLE	ARCHI REACH MINI	- SQUARE	- 3	- 3000K	- 90	- 3	- 24	- DMX	- TH

# DIMENSIONS

Unit: mm

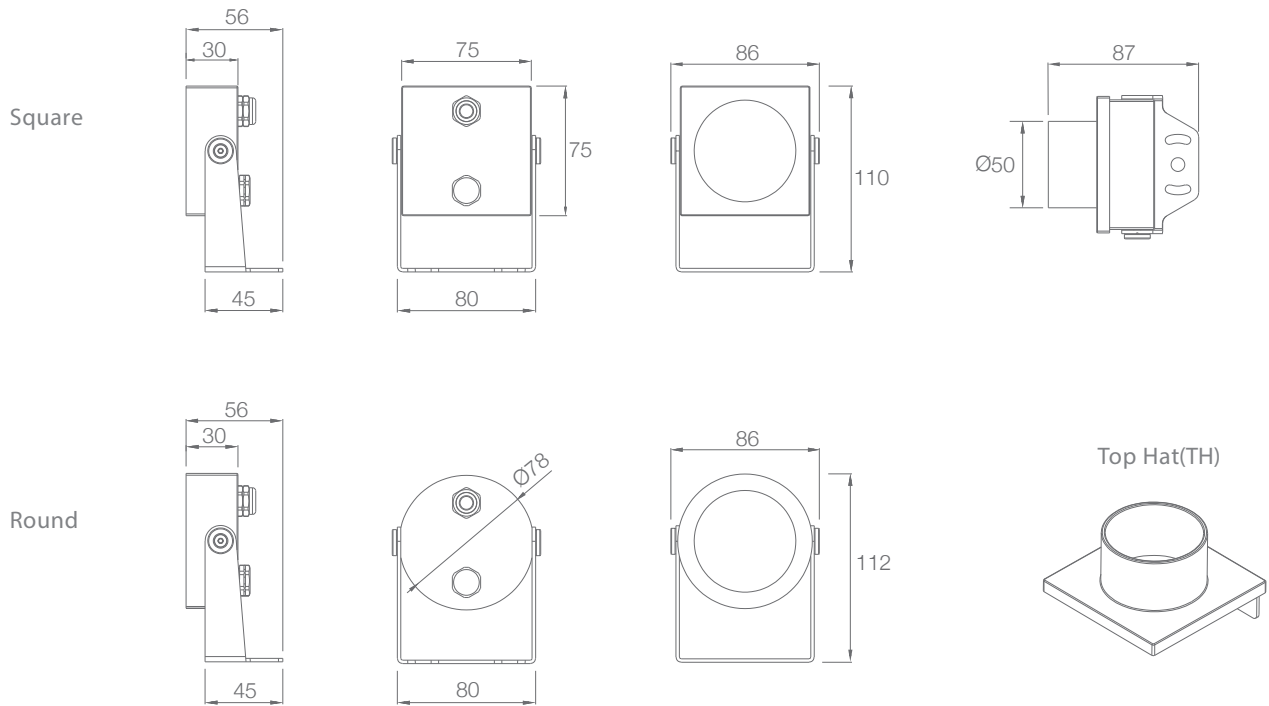

# OPTIC SELECTION



3°

LED	Lumens	Watts	Efficacy
WHITE	190.26	3.00	63.42

CenterBeamLux	Illuminance at Distance
2296.59 lx	5.0m
574.15 lx	10.0m
255.18 lx	15.0m
143.54 lx	20.0m
91.86 lx	25.0m
63.79 lx	30.0m

■ Ver. Spread: 2.8°    ■ Horiz. Spread: 2.8°



7°

LED	Lumens	Watts	Efficacy
WHITE	341.70	5.00	68.34

CenterBeamLux	Illuminance at Distance
2377.76 lx	5.0m
594.44 lx	10.0m
264.20 lx	15.0m
148.61 lx	20.0m
95.11 lx	25.0m
66.05 lx	30.0m

■ Ver. Spread: 7.2°    ■ Horiz. Spread: 7.2°

3000K