


ARCHI REACH 120

IP66 **WASH**

Extremely narrow beam by powerful 4 in 1 LED
Extra-long distance shooting.

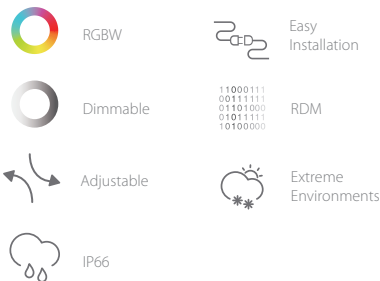







SPECIFICATION

MODEL	▶ ARCHI REACH 120
OPERATING VOLTAGE	▶ 24V DC, 48V DC
POWER CONSUMPTION	▶ 25W MAX
LED TYPE	▶ 4in1 High Power LED
COLOR RANGE	▶ 2700K,3000K,4000K,5000K,RGB,RGBW
CRI	▶ 80min
SYSTEM EFFICIENCY	▶ 60lm/W@3000K
FWHM	▶ 4°, 10°, 25°, 40°
MATERIAL	▶ Aluminum + Tempered Glass
OPERATING TEMPERATURE	▶ -20°C ~ +55°C
STORAGE TEMPERATURE	▶ -25°C ~ +60°C
LIFE TIME	▶ 50,000 hours/L70 at 25°C
DIMENSIONS	▶ Φ120*120(H)mm ▶ Φ127*165(H)mm (With top hat)
CABLE LENGTH	▶ 1000mm
WATER PROOF	▶ IP66
CONTROL	▶ ON/OFF, DMX/RDM (Remote), 0 -10V Dim
LIST	▶ CE

ORDER CODE	MODEL	SHAPE	POWER	CCT	CRI	OPTICS	VOLTAGE	CONTROL	ACC
EXAMPLE	ARCHI REACH 120	- ROUND	- 25	- 3000K	- 90	- 10	- 24	- DMX	- TH

DIMENSIONS

Unit: mm

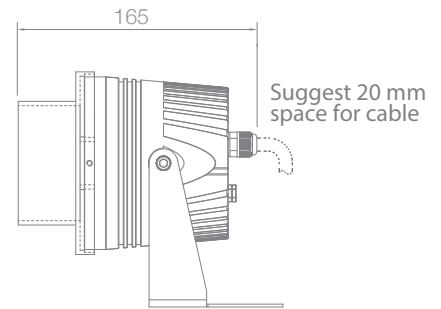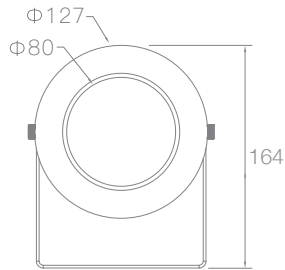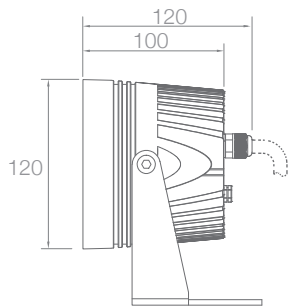

With Top Hat (TH)

OPTIC SELECTION



4°

LED	Lumens	Watts	Efficacy
WHITE	1275.08	25.00	51.01

CenterBeamLux	Illuminance at Distance
7653.72 lx	5.0m
1913.43 lx	10.0m
850.41 lx	15.0m
478.36 lx	20.0m
306.15 lx	25.0m
212.60 lx	30.0m

■ Ver. Spread: 4.1° ■ Horiz. Spread: 4.0°



10°

LED	Lumens	Watts	Efficacy
WHITE	1502.70	25.00	60.10

CenterBeamLux	Illuminance at Distance
1098.86 lx	5.0m
274.71 lx	10.0m
122.10 lx	15.0m
68.68 lx	20.0m
43.95 lx	25.0m
30.52 lx	30.0m

■ Ver. Spread: 11.5° ■ Horiz. Spread: 11.6°

3000K