

ARCHI SPOT 45

IP67 **WASH**

4 in 1 LED and Optic generates smooth color under RGBW version,
Compact and simple structure offers high lumen efficiency.





SPECIFICATION

MODEL	‣ ARCHI SPOT 45
OPERATING VOLTAGE	‣ 24V DC, AC200~240V
POWER CONSUMPTION	‣ 3W, 6W
LED TYPE	‣ High Power LED
COLOR RANGE	‣ 2700K,3000K,3500K,4000K,5000K,Tunable White,RGB,RGBW
CRI	‣ 90min,80min
SYSTEM EFFICIENCY	‣ 76.40lm/W@3000K
FWHM	‣ 5° (Mono Color), 8° (Mono Color), 15°, 24°, 36°, 45°, 60°
MATERIAL	‣ Aluminum + Tempered Glass
OPERATING TEMPERATURE	‣ -20°C ~ +55°C
STORAGE TEMPERATURE	‣ -25°C ~ +60°C
LIFE TIME	‣ 50,000 hours/L70 at 25°C
CONNECTION	‣ Quick-Plug
DIMENSIONS	‣ 45*65*70mm(ON/OFF Version), 45*90*70mm(AC/DMX Version) 45*120*70mm(AC+DMX Version)
CABLE LENGTH	‣ 500mm
WATER PROOF	‣ IP67
CONTROL	‣ ON/OFF, DALI, DMX/RDM, 0-10V Dim
LIST	‣ CE


ORDER CODE	MODEL	UNIT/LENGTH	POWER	CCT	CRI	OPTICS	VOLTAGE	CONTROL	ACC	
EXAMPLE	ARCHI SPOT 45	-	N/A	- 6	- 3000K	- 90	- 15	- 24	- DMX	- HC

DIMENSIONS



Unit: mm

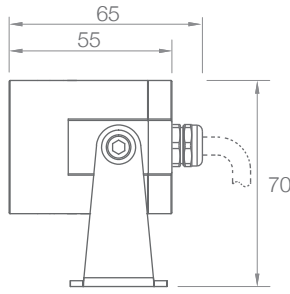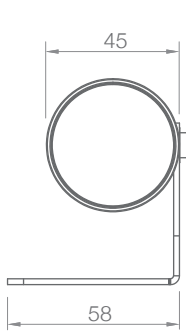


Suggest 15 mm space for cable



ON/OFF Version

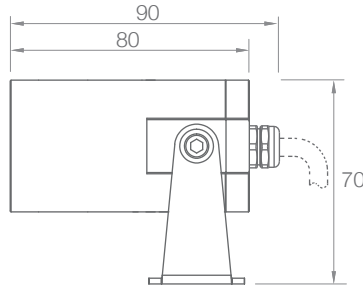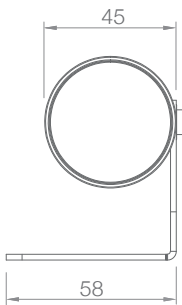


Suggest 15 mm space for cable



AC/DMX Version

Top Hat (TH)



Honey Comb (HB)



OPTIC SELECTION



8°

LED	Lumens	Watts	Efficacy
WHITE	385.80	6.00	64.30

CenterBeamLux	
37783.58 lx	0.8m
9445.90 lx	1.7m
4198.18 lx	2.5m
2361.47 lx	3.3m
1511.34 lx	4.2m
1049.54 lx	5.0m

■ Ver. Spread: 8.1° ■ Horiz. Spread: 8.5°



24°

LED	Lumens	Watts	Efficacy
WHITE	458.40	6.00	76.40

CenterBeamLux	Distance	Illuminance at Distance
1820.86 lx	0.8m	
425.22 lx	1.7m	
200.10 lx	2.5m	
121.30 lx	3.3m	
84.83 lx	4.2m	
65.02 lx	5.0m	

■ Ver. Spread: 24.7° ■ Horiz. Spread: 25.7°

3000K