


ARCHI SPOT 200

IP66 **WASH**

Elegant designed fixture offers consistent and high quality light output,
 Compact dimension enable installation at limit space,
 Various beam angles offer from extremely narrow to wide or oval beam.
 Good Thermal management benefits long life time.



-  RGBW
-  Dimmable
-  Adjustable
-  IP66
-  Easy Installation
-  RDM
-  Extreme Environments
-  AC-IN


SPECIFICATION

MODEL	▶ ARCHI SPOT 200
OPERATING VOLTAGE	▶ 24V DC, 48V DC, AC 100–240V
POWER CONSUMPTION	▶ 70W MAX
LED TYPE	▶ High Power LED
COLOR RANGE	▶ 2700K,3000K,4000K,5000K,Tunable White,RGB,RGBW
CRI	▶ 90min, 80min
SYSTEM EFFICIENCY	▶ 70lm/W@3000K
FWHM	▶ 4°, 10°, 25°, 40°, 8°*15°, 8°*30°, 8°*60°
MATERIAL	▶ Aluminum + Tempered Glass
OPERATING TEMPERATURE	▶ -20°C ~ +55°C
STORAGE TEMPERATURE	▶ -25°C ~ +60°C
LIFE TIME	▶ 50,000 hours/L70 at 25°C
CONNECTION	▶ Quick-Plug
DIMENSIONS	▶ Φ200*137(H)mm
CABLE LENGTH	▶ 1000mm
WATER PROOF	▶ IP66
CONTROL	▶ ON/OFF, DMX/RDM, 0–10V Dim
LIST	▶ CE


ORDER CODE	MODEL	UNIT/LENGTH	POWER	CCT	CRI	OPTICS	VOLTAGE	CONTROL	ACC								
EXAMPLE	ARCHI SPOT 200	-	N/A	-	70	-	3000K	-	90	-	10	-	220	-	DMX	-	HC

DIMENSIONS


Unit: mm

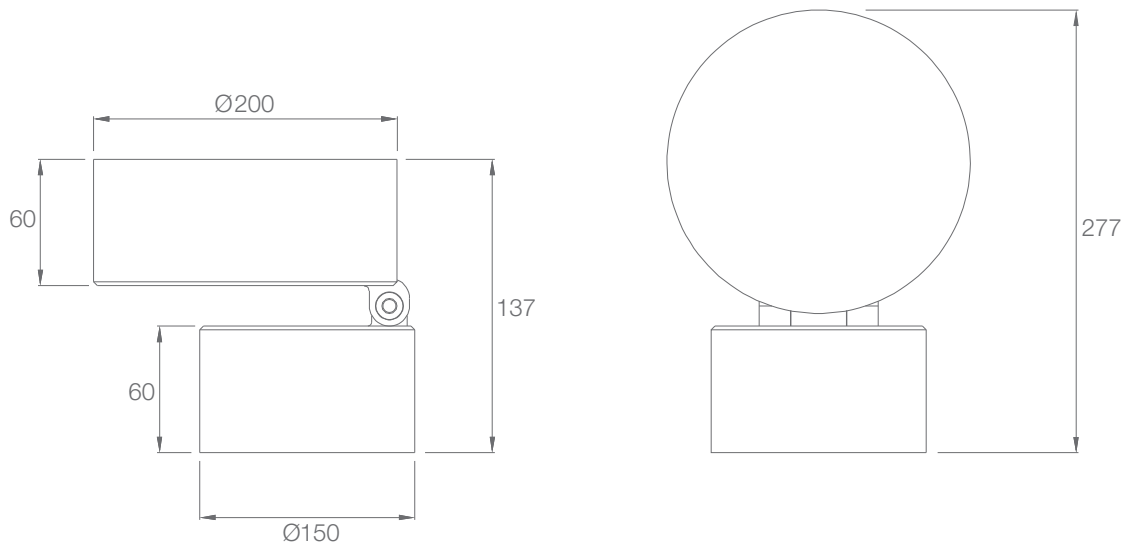

Honey Comb(HC)



Top Hat (TH)



OPTIC SELECTION



4°

LED	Lumens	Watts	Efficacy
WHITE	4762.10	70.00	68.03

CenterBeamLux	Illuminance at Distance
21545.37 lx	5.0m
5384.25 lx	10.0m
2389.23 lx	15.0m
1345.04 lx	20.0m
857.96 lx	25.0m
595.91 lx	30.0m

■ Ver. Spread: 4.1° ■ Horiz. Spread: 4.2°



10°

LED	Lumens	Watts	Efficacy
WHITE	4908.40	70.00	70.12

CenterBeamLux	Illuminance at Distance
3356.59 lx	5.0m
838.21 lx	10.0m
370.21 lx	15.0m
211.43 lx	20.0m
131.43 lx	25.0m
90.61 lx	30.0m

■ Ver. Spread: 11.3° ■ Horiz. Spread: 11.5°

3000K