


ARCHI UPLIGHT 100

IP67 **WASH**

Aluminum housed, IP67, inground uplight ideal for outdoor and indoor applications,
Finished with tempered glass with black internal edge coating for glare control,
Wide range of optics for each installation application,

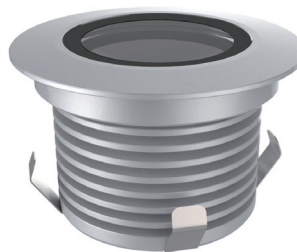

RGBW



RDM



Dimmable




Extreme Environments



IP67



Easy Installation






SPECIFICATION

MODEL	‣ ARCHI UPLIGHT 100
OPERATING VOLTAGE	‣ 24V DC, 48V DC
POWER CONSUMPTION	‣ 12W MAX
LED TYPE	‣ COB
COLOR RANGE	‣ 2700K,3000K,4000K,5000K,Tunable White,RGB,RGBW
CRI	‣ 90min
SYSTEM EFFICIENCY	‣ 75lm/W@3000K
FWHM	‣ 12°, 24°, 36°, 55°
MATERIAL	‣ Aluminum + Tempered Glass
PROTECTION	‣ IK10
OPERATING TEMPERATURE	‣ -20°C ~ +55°C
STORAGE TEMPERATURE	‣ -25°C ~ +60°C
LIFE TIME	‣ 50,000 hours/L70 at 25°C
DIMENSIONS	‣ Φ109*90(H)mm
CABLE LENGTH	‣ 500mm
WATER PROOF	‣ IP67
CONTROL	‣ ON/OFF, DMX, 0-10V Dim, DALI
LIST	‣ CE


ORDER CODE	MODEL	UNIT/LENGTH	POWER	CCT	CRI	OPTICS	VOLTAGE	CONTROL	ACC						
EXAMPLE	ARCHI UPLIGHT 100	-	N/A	-	12	-	3000K-90	-	12	-	24	-	ON/OFF	-	HC

DIMENSIONS


Unit: mm

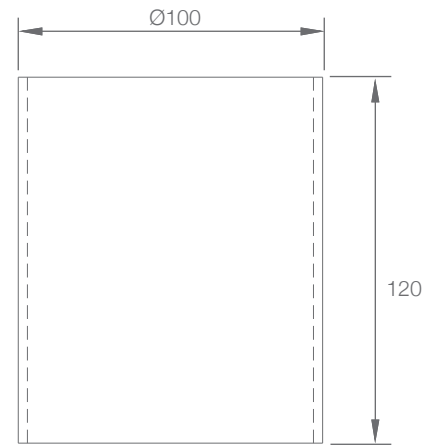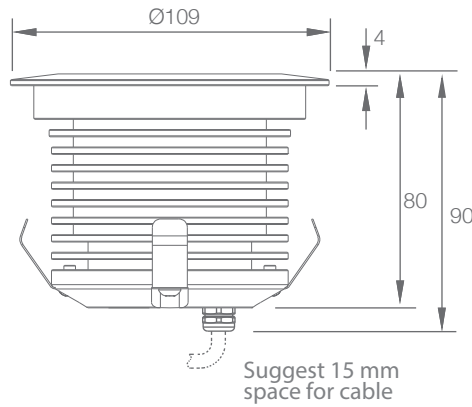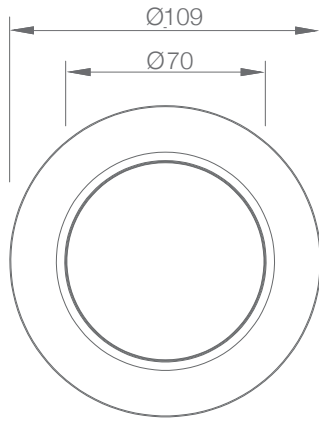


Pre installation Kit(PIKS)



Honey Comb(HC)



Half Moon Glass



Full Moon Glass



Cut Out 100mm

OPTIC SELECTION



12°

LED	Lumens	Watts	Efficacy
WHITE	912.00	12.00	76.00

CenterBeamLux	Illuminance at Distance
19606.69 lx	0.5m
4901.67 lx	1.7m
2178.52 lx	2.5m
1225.42 lx	3.3m
784.27 lx	4.2m
544.63 lx	5.0m

■ Ver. Spread: 12.4° ■ Horiz. Spread: 12.7°



36°

LED	Lumens	Watts	Efficacy
WHITE	939.36	12.00	78.28

CenterBeamLux	Illuminance at Distance
4148.68 lx	0.5m
1011.17 lx	1.7m
483.19 lx	2.5m
271.79 lx	3.3m
173.95 lx	4.2m
120.80 lx	5.0m

■ Ver. Spread: 36.5° ■ Horiz. Spread: 35.4°

3000K