










# MEGA SLIM G3

IP66 **GRAZE**

Extremely high lumen output provided by sophisticated designed slim structure,  
 Unique 5 in 1 RGBWW LED bring smooth vivid color and pure white light,  
 Perfect selection for high wall grazing by linear connection.



-  RGBWW
-  Easy Installation
-  Dimmable
-  RDM
-  Adjustable
-  Extreme Environments
-  IP66
-  AC-IN

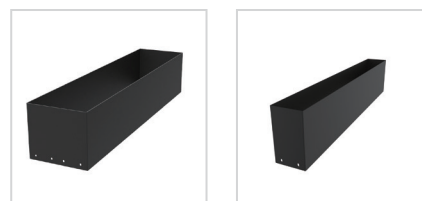


## SPECIFICATION

MODEL	▶ MEGA SLIM G3
OPERATING VOLTAGE	▶ AC 100–240V
POWER CONSUMPTION	▶ 100W/1220mm Unit, 300W/1220mm 3Units,
LED TYPE	▶ 5in1 High Power LED
COLOR RANGE	▶ 2700K,3000K,3500K,4000K,5000K,RGB,RGBW,RGBWW
CRI	▶ 90min, 80min
SYSTEM EFFICIENCY	▶ 68lm/W@3000K
FWHM	▶ 6°, 8°*15°, 8°*30°, 8°*50°, 20°*40°, 25°, 30°*60°, 40°
MATERIAL	▶ Aluminum + Tempered Glass
OPERATING TEMPERATURE	▶ -20°C ~ +55°C
STORAGE TEMPERATURE	▶ -25°C ~ +60°C
LIFE TIME	▶ 50,000 hours/L70 at 25°C
CONNECTION	▶ Quick-Plug
DIMENSIONS	▶ 1220(L)*62(W)*114(H)mm, 305/610/915/1000mm available
CABLE LENGTH	▶ 150mm
WATER PROOF	▶ IP66
CONTROL	▶ ON/OFF, DMX/RDM, 0–10V Dim
LIST	▶ CE

ORDER CODE	MODEL	UNIT/LENGTH	POWER	CCT	CRI	OPTICS	VOLTAGE	CONTROL	ACC
EXAMPLE	MEGA SLIM G3	– 1U1220	– 100	– 3000K	– 90	– 6	– 220	– DMX	– LOUVER

# DIMENSIONS

Unit: mm

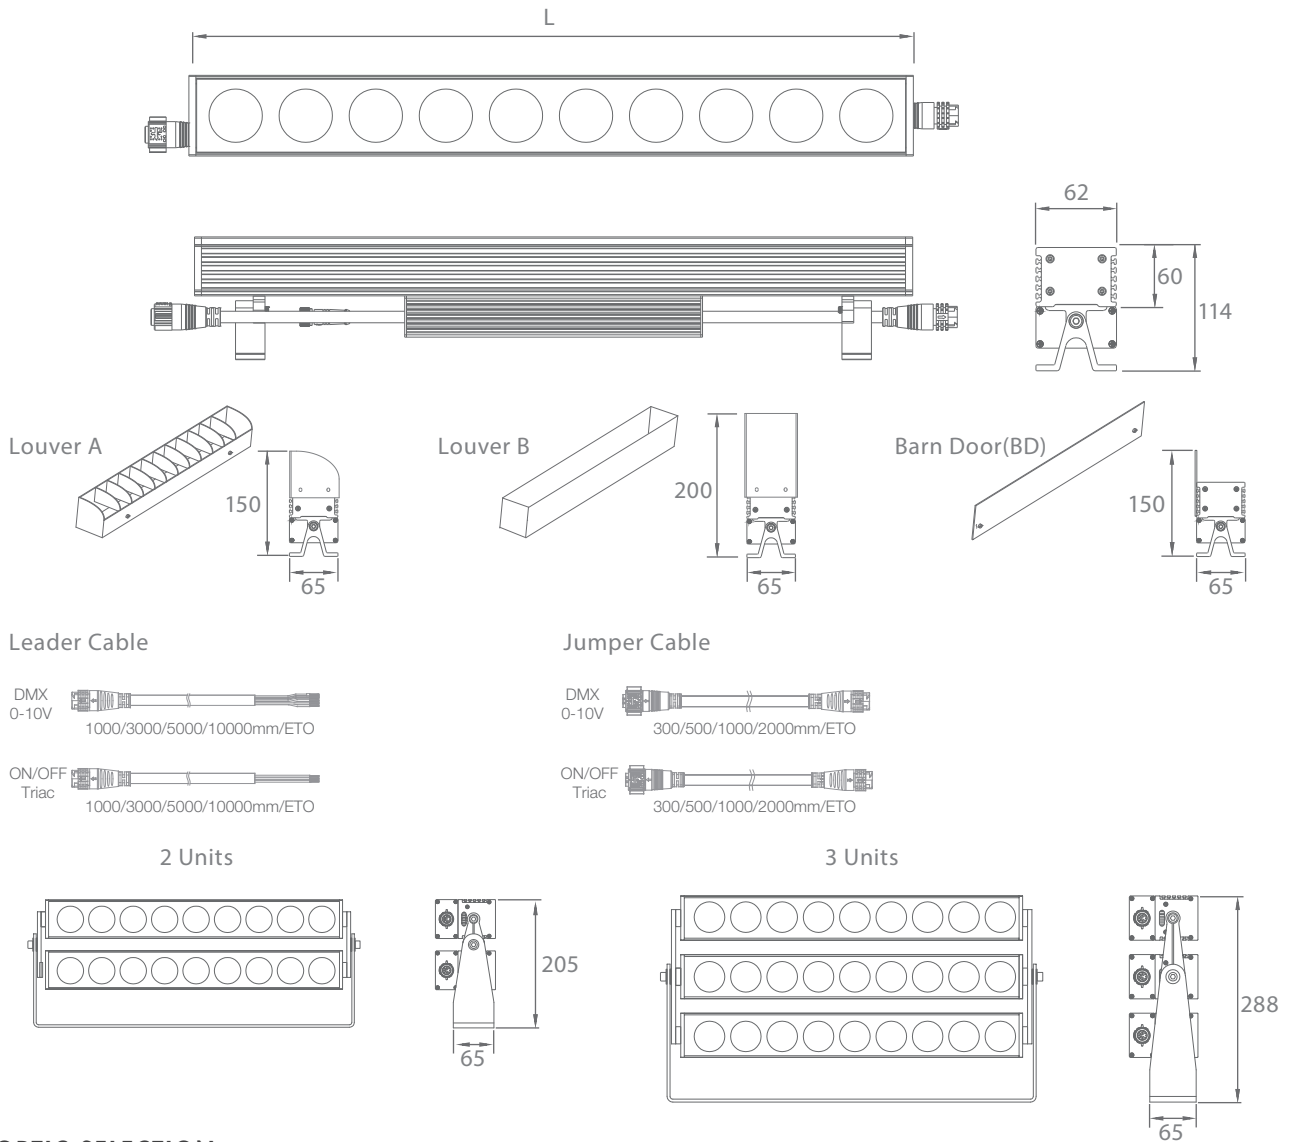

# OPTIC SELECTION

**6°**

LED	Lumens	Watts	Efficacy
WHITE	6018.00	100.00	60.18

CenterBeamLux	Illuminance at Distance
20971.92 lx	5.0m
5242.98 lx	10.0m
2330.21 lx	15.0m
1310.75 lx	20.0m
838.88 lx	25.0m
582.55 lx	30.0m

■ Ver. Spread: 5.8°    ■ Horiz. Spread: 5.9°

**8°X50°**

LED	Lumens	Watts	Efficacy
WHITE	6350.00	100.00	63.50

CenterBeamLux	Illuminance at Distance
2246.46 lx	5.0m
561.62 lx	10.0m
249.61 lx	15.0m
140.40 lx	20.0m
89.86 lx	25.0m
62.40 lx	30.0m

■ Ver. Spread: 6.5°    ■ Horiz. Spread: 48.5°

3000K