


MP-LINEAR DC

IP66 **GRAZE**

Cost effective and competitive for grazing,
The optic design offers smooth mixture of colors,
The composition and efficient design save expensive
labor installation costs and achieving long runs of
quality illumination in minimal time.

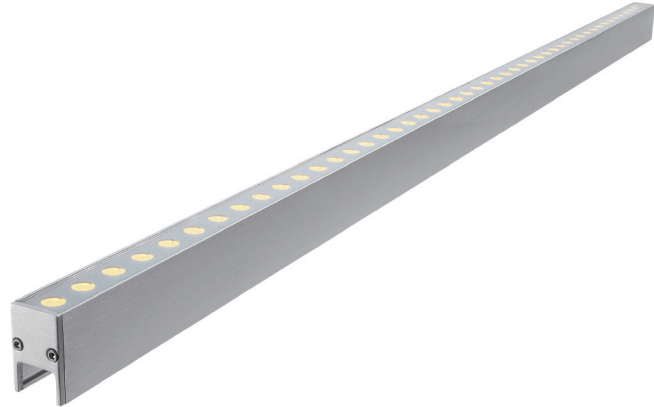

RGBW



Easy
Installation



Dimmable



RDM




Adjustable



Extreme
Environments



IP66





SPECIFICATION

MODEL	‣ MP-LINEAR DC
OPERATING VOLTAGE	‣ 24V DC, 48V DC
POWER CONSUMPTION	‣ 9W/305mm, 31W/1220mm
LED TYPE	‣ High Power LED
COLOR RANGE	‣ 2700K,3000K,4000K,5000K,Tunable White,RGB,RGBW
CRI	‣ 90min, 80min
SYSTEM EFFICIENCY	‣ 78.3lm/W@3000K
FWHM	‣ 10°*40°, 20°*40°, 25°, 35°, 45°, 60°
MATERIAL	‣ Aluminum + Tempered Glass
OPERATING TEMPERATURE	‣ -20°C ~ +55°C
STORAGE TEMPERATURE	‣ -25°C ~ +60°C
LIFE TIME	‣ 50,000 hours/L70 at 25°C
CONNECTION	‣ Quick-Plug
DIMENSIONS	‣ 1220(L)*25(W)*43(H)mm(Flat Bracket) 1220(L)*25(W)*60(H)mm (Adjustable Bracket) 305/500/1000mm available
CABLE LENGTH	‣ 300mm
WATER PROOF	‣ IP66
CONTROL	‣ ON/OFF, DMX/RDM, 0-10V Dim
LIST	‣ CE



ORDER CODE	MODEL	LENGTH	POWER	CCT	CRI	OPTICS	VOLTAGE	CONTROL	ACC
EXAMPLE	MP-LINEAR DC	- 1220	- 31	- 3000K	- 90	- 1040	- 24	- DMX	- LOUVER

DIMENSIONS

Unit: mm

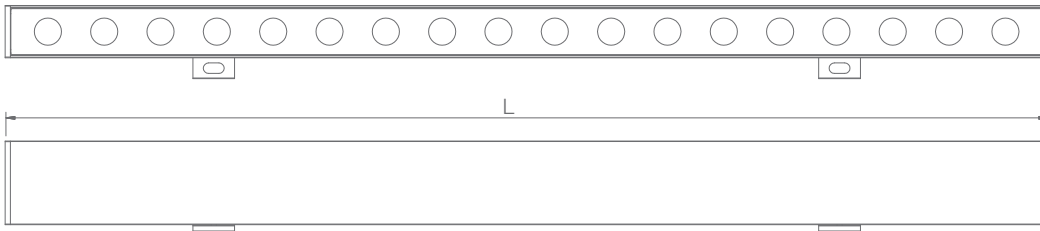


Flat Bracket

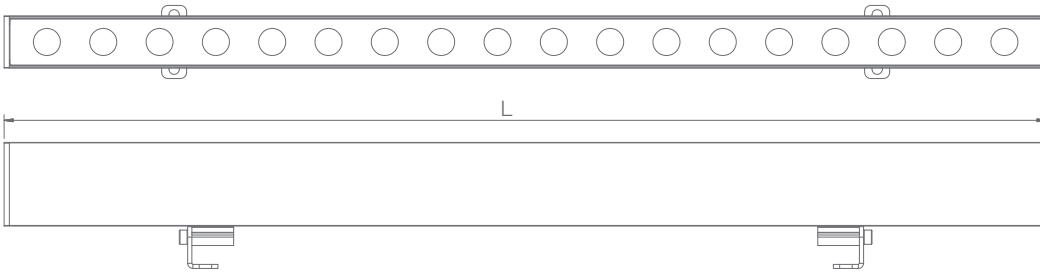


Adjustable Bracket


Louver




Barn Door(BD)



Leader Cable



Jumper Cable



OPTIC SELECTION



10°X40°

LED	Lumens	Watts	Efficacy
WHITE	2119.17	31.00	68.35

CenterBeamLux	Illuminance at Distance
1589.76 lx	2.5m
397.44 lx	5.0m
176.64 lx	7.5m
99.36 lx	10.0m
63.59 lx	12.5m
44.16 lx	15.0m

■ Ver. Spread: 11.8° ■ Horiz. Spread: 45.8°



20°X40°

LED	Lumens	Watts	Efficacy
WHITE	2296.01	31.00	74.06

CenterBeamLux	Illuminance at Distance
1388.81 lx	2.5m
347.20 lx	5.0m
154.31 lx	7.5m
86.80 lx	10.0m
55.55 lx	12.5m
38.58 lx	15.0m

■ Ver. Spread: 16.6° ■ Horiz. Spread: 44.5°

3000K