

LP-LINEAR DC

IP66 **GRAZE**

A low height profile for limited space,
End to End connection makes installation easier,
Various beam angles are available,
Choose from customized color temperatures.



RGBW



Easy Installation



Dimmable



RDM



Adjustable



Extreme Environments



IP66





SPECIFICATION

MODEL	› LP-LINEAR DC
OPERATING VOLTAGE	› 24V DC
POWER CONSUMPTION	› 4W/305mm, 14W/1220mm
LED TYPE	› SMD, High Power LED
COLOR RANGE	› 2700K,3000K,4000K,5000K,Tunable White,RGB,RGBW
CRI	› 90min, 80min
SYSTEM EFFICIENCY	› 61lm/W@3000K
FWHM	› 10°*40°, 20°*40°, 40°
MATERIAL	› Aluminum + Tempered Glass
OPERATING TEMPERATURE	› -20°C ~ +55°C
STORAGE TEMPERATURE	› -25°C ~ +60°C
LIFE TIME	› 50,000 hours/L70 at 25°C
CONNECTION	› Quick-Plug
DIMENSIONS	› 1220(L)*25(W)*33(H)mm (Flat Bracket) › 1220(L)*25(W)*50(H)mm (Adjustable Bracket) › 305/500/1000mm available
CABLE LENGTH	› 300mm
WATER PROOF	› IP66
CONTROL	› ON/OFF, DMX/RDM, 0-10V Dim
LIST	› CE



ORDER CODE	MODEL	LENGTH	POWER	CCT	CRI	OPTICS	VOLTAGE	CONTROL	ACC
EXAMPLE	LP-LINEAR DC	- 1220	- 14	- 3000K	- 90	- 1040	- 24	- ON/OFF	

DIMENSIONS

Unit: mm

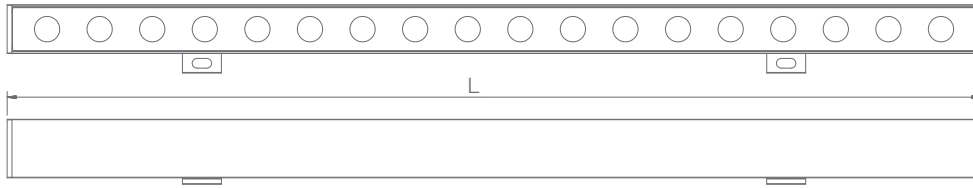


Flat Bracket

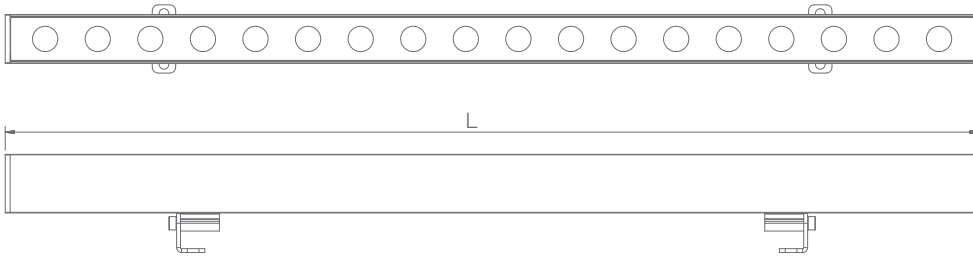


Adjustable Bracket

Louver





Barn Door(BD)



Leader Cable



Jumper Cable



OPTIC SELECTION



20°X40°

LED	Lumens	Watts	Efficacy
WHITE	843.84	14.40	58.60

CenterBeamLux	Illuminance at Distance
469.71 lx	1.7m
117.13 lx	3.3m
52.06 lx	5.0m
29.28 lx	6.7m
18.74 lx	8.3m
12.88 lx	10.0m

■ Ver. Spread: 22.7° ■ Horiz. Spread: 40.7°



40°

LED	Lumens	Watts	Efficacy
WHITE	854.00	14.00	61.00

CenterBeamLux	Illuminance at Distance
407.17 lx	1.7m
101.49 lx	3.3m
44.33 lx	5.0m
25.47 lx	6.7m
16.31 lx	8.3m
11.32 lx	10.0m

■ Ver. Spread: 43.9° ■ Horiz. Spread: 43.7°

3000K