

SMART COVE OUTDOOR

IP66 **GRAZE**

The integrated optic offers superb color consistency without hotspots,
 The possesses low height profile and ultra slim design,
 The fixture delivers narrow beam angle for grazing,
 The control system provides balanced uniform light output.



RGBW



Easy Installation



Dimmable




Extreme Environments



Adjustable



IP66




SPECIFICATION

MODEL	› SMART COVE OUTDOOR
OPERATING VOLTAGE	› 24V DC, 48V DC
POWER CONSUMPTION	› 8W/305mm, 32W/1220mm
LED TYPE	› SMD
COLOR RANGE	› 2700K,3000K,3500K,4000K,5000K,Tunable White,RGBW
CRI	› 90min, 80min
SYSTEM EFFICIENCY	› 48lm/W@2700K
FWHM	› Integrated lens: 20°*90°, 40°*90°, 60°*90° / 120°
MATERIAL	› Aluminum + Tempered Glass
OPERATING TEMPERATURE	› -20°C ~ +55°C
STORAGE TEMPERATURE	› -25°C ~ +60°C
LIFE TIME	› 50,000 hours/L70 at 35°C
CONNECTION	› Quick-Plug
DIMENSIONS	› 1220(L)*25(W)*29(H)mm (Flat Bracket) 1220(L)*25(W)*48(H)mm (Adjustable Bracket) 305/610/915/1000mm ETO available
WATER PROOF	› 300mm
WATER PROOF	› IP66
CONTROL	› ON/OFF, DMX (Remote), 0-10V Dim
LIST	› CE


ORDER CODE	MODEL	LENGTH	POWER	CCT	CRI	OPTICS	VOLTAGE	CONTROL	ACC
EXAMPLE	SMART COVE OUTDOOR -	1220	- 32	- 3000K	- 90	- 2090	- 24	- ON/OFF	

DIMENSIONS

Unit: mm

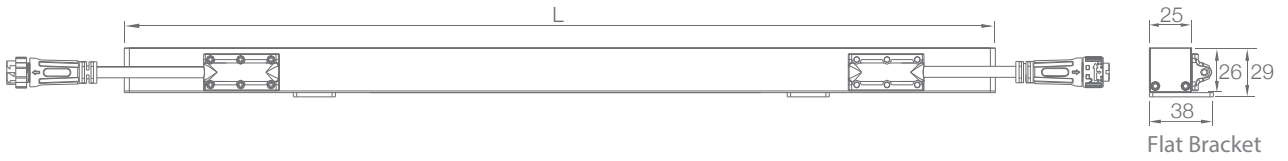


Flat Bracket

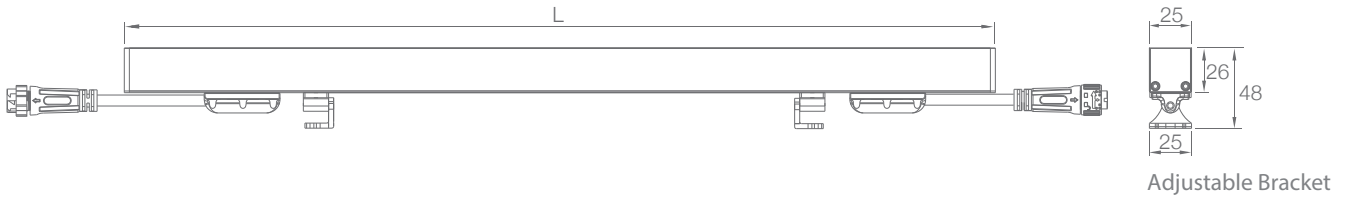


Adjustable Bracket


Leader Cable



Jumper Cable



Barn Door(BD)



OPTIC SELECTION



20°X90°

LED	Lumens	Watts	Efficacy
WHITE	1536.00	32.00	48.00

CenterBeamLux	Illuminance at Distance
229.66 lx	0.8m
57.42 lx	1.7m
25.52 lx	2.5m
14.35 lx	3.3m
9.19 lx	4.2m
6.38 lx	5.0m

■ Ver. Spread: 22.5° ■ Horiz. Spread: 79.0°

2700K



20°X90°

LED	Lumens	Watts	Efficacy
WHITE	1600.40	32.00	50.01

CenterBeamLux	Illuminance at Distance
239.23 lx	0.8m
59.81 lx	1.7m
26.58 lx	2.5m
14.95 lx	3.3m
9.57 lx	4.2m
6.65 lx	5.0m

■ Ver. Spread: 22.5° ■ Horiz. Spread: 79.0°

3000K



20°X90°

LED	Lumens	Watts	Efficacy
WHITE	1728.00	32.00	54.00

CenterBeamLux	Illuminance at Distance
258.37 lx	0.8m
64.59 lx	1.7m
28.71 lx	2.5m
16.15 lx	3.3m
10.33 lx	4.2m
7.18 lx	5.0m

■ Ver. Spread: 22.5° ■ Horiz. Spread: 79.0°

4000K