


PIXEL SMART COVE OUTDOOR

IP66 **PIXEL**

The integrated optic offers superb color consistency without hotspots,
 The possesses low height profile and ultra slim design,
 The fixture delivers narrow beam angle for grazing,
 The control system provides balanced uniform light output.

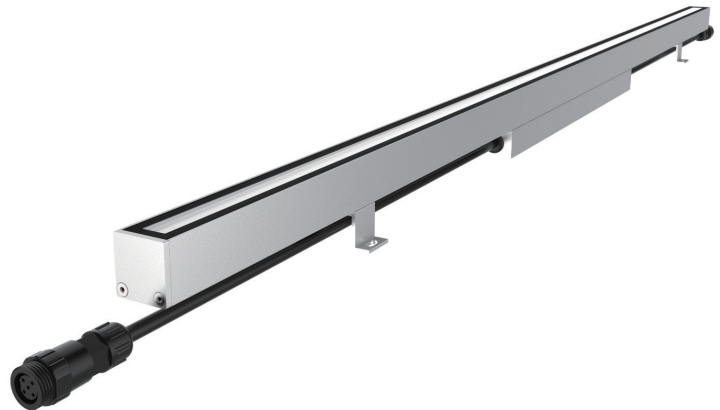

RGBW



Easy Installation



Dimmable




Extreme Environments



Adjustable



IP66





SPECIFICATION

MODEL	› PIXEL SMART COVE OUTDOOR
OPERATING VOLTAGE	› 24V DC
POWER CONSUMPTION	› 6W/305mm, 25W/1220mm
LED TYPE	› SMD
COLOR RANGE	› 2700K,3000K,3500K,4000K,5000K,Tunable White,RGBW,RGBWW
PIXEL	› 12 Pixels/24Pixels/1220mm
CRI	› 90min, 80min
SYSTEM EFFICIENCY	› 54lm/W@4000K
FWHM	› Integrated lens: 20°*90°, 40°*90°, 60°*90°
MATERIAL	› Aluminum + Tempered Glass
OPERATING TEMPERATURE	› -20°C ~ +55°C
STORAGE TEMPERATURE	› -25°C ~ +60°C
LIFE TIME	› 50,000 hours/L70 at 25°C
CONNECTION	› Quick-Plug
DIMENSIONS	› 1220(L)*25(W)*50(H)mm(Adjustable Bracket) 1220(L)*25(W)*48(H)mm(Dual Sides Bracket) 305/500/1000mm available
WATER PROOF	› 300mm
WATER PROOF	› IP20,IP66
CONTROL	› DMX
LIST	› CE


ORDER CODE	MODEL	LENGTH	PIXEL	POWER	CCT	CRI	OPTICS	VOLTAGE	CONTROL	COVER
EXAMPLE	PIXEL SMART COVE OUTDOOR	- 1220	- 12	- 25	- RGBW	- N/A	- 2090	- 24	- DMX	

DIMENSIONS


Unit: mm

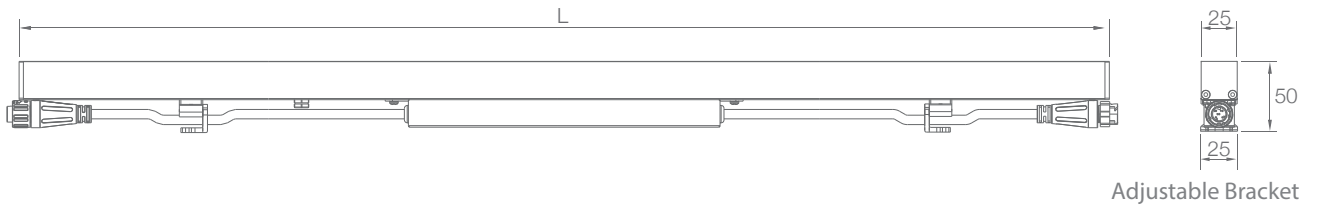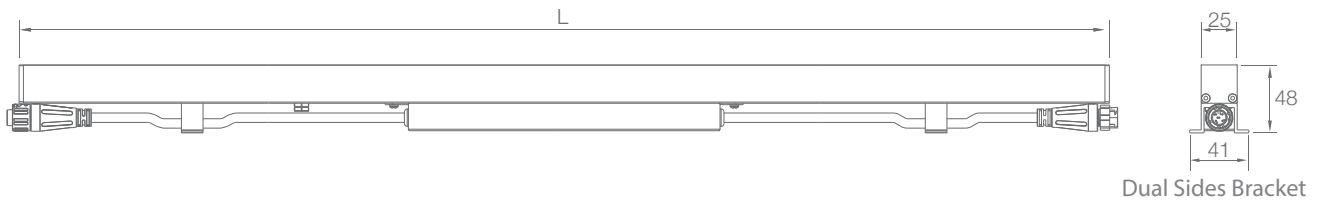

Leader Cable



Jumper Cable



OPTIC SELECTION



20°X90°

LED	Lumens	Watts	Efficacy
WHITE	1200.00	25.00	48.00

CenterBeamLux	Illuminance at Distance
178.90 lx	0.8m
44.85 lx	1.7m
19.92 lx	2.5m
10.95 lx	3.3m
7.18 lx	4.2m
4.98 lx	5.0m

■ Ver. Spread: 22.5° ■ Horiz. Spread: 79.0°

2700K



20°X90°

LED	Lumens	Watts	Efficacy
WHITE	1250.00	25.00	50.01

CenterBeamLux	Illuminance at Distance
186.71 lx	0.8m
46.72 lx	1.7m
19.58 lx	2.5m
11.68 lx	3.3m
7.47 lx	4.2m
5.18 lx	5.0m

■ Ver. Spread: 22.5° ■ Horiz. Spread: 79.0°

3000K



20°X90°

LED	Lumens	Watts	Efficacy
WHITE	1350.00	25.00	54.00

CenterBeamLux	Illuminance at Distance
201.24 lx	0.8m
50.38 lx	1.7m
22.39 lx	2.5m
12.55 lx	3.3m
8.03 lx	4.2m
5.68 lx	5.0m

■ Ver. Spread: 22.5° ■ Horiz. Spread: 79.0°

4000K