
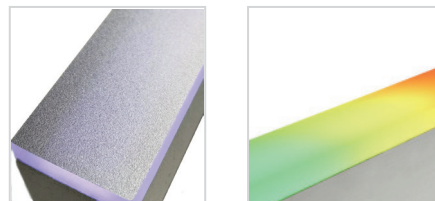


# PIXEL MIDI SLIM

IP66 **PIXEL**

The unique milky cover offers smooth light without any visible LED hotspots,  
 The 2 steps bin selection provides uniform light output upon request,  
 Ultra slim body results in easy installation.

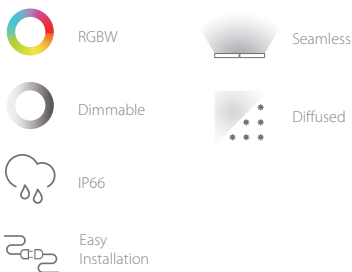


## SPECIFICATION

MODEL	▶ PIXEL MIDI SLIM
OPERATING VOLTAGE	▶ 24V DC, 48V DC
POWER CONSUMPTION	▶ 3.5W/305mm, 14.4W/1220mm
LED TYPE	▶ SMD
COLOR RANGE	▶ 2400K,2700K,3000K,4000K,5000K,Tunable White,RGB,RGBW
PIXEL	▶ 8 Pixels/12 Pixels/24 Pixels/1220mm
CRI	▶ 90min, 80min
SYSTEM EFFICIENCY	▶ 62lm/W@3000K
FWHM	▶ 120°
MATERIAL	▶ Aluminum + PMMA/Metallic Skin
OPERATING TEMPERATURE	▶ -20°C ~ +55°C
STORAGE TEMPERATURE	▶ -25°C ~ +60°C
LIFE TIME	▶ 50,000 hours/L70 at 25°C
CONNECTION	▶ Quick-Plug
DIMENSIONS	▶ 1220(L)*24(W)*50(H)mm(Flat Diffuser), 305/610/1000mm available 1220(L)*24(W)*55(H)mm(Dome Diffuser), 305/610/1000mm available
CABLE LENGTH	▶ 300mm
WATER PROOF	▶ IP66
CONTROL	▶ ON/OFF,DMX 0-10V Dim
LIST	▶ CE


ORDER CODE	MODEL	LENGTH	PIXEL	POWER	CCT	CRI	OPTICS	VOLTAGE	CONTROL	COVER
EXAMPLE	PIXEL MIDI SLIM	- 1220	- 12	- 14.4	- RGBW	- /	- 120	- 24	- DMX	- FD

**DIMENSIONS**


Unit: mm

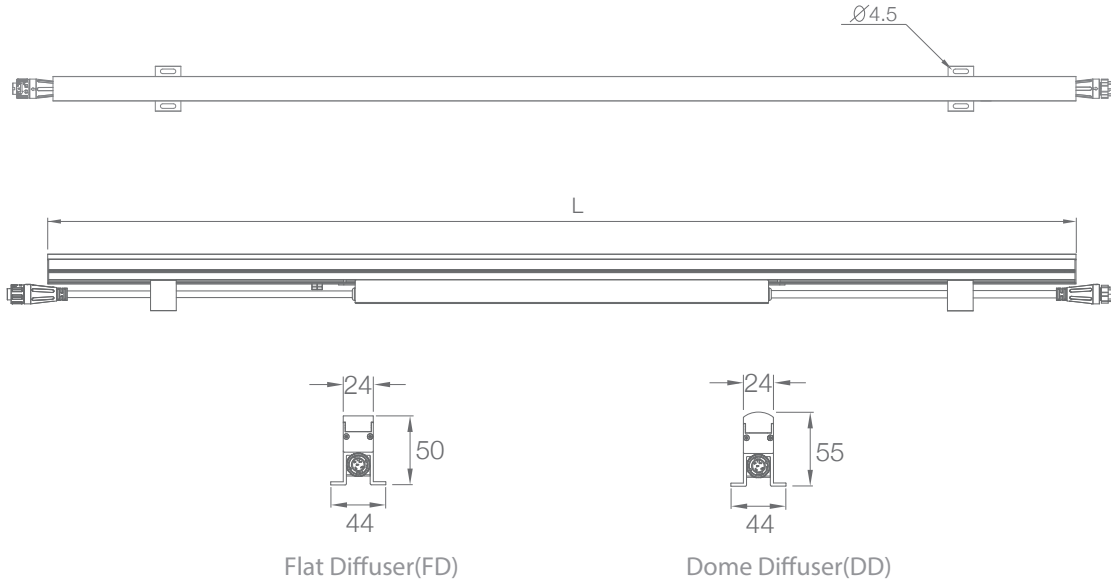

**Leader Cable**

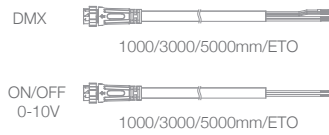

**Jumper Cable**

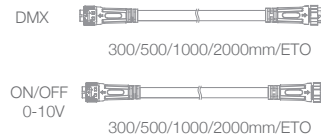

**OPTIC SELECTION**



120°

LED	Lumens	Watts	Efficacy
WHITE	674.40	12.00	56.20

CenterBeamLux	Illuminance at Distance
1292.44 lx	0.3m
293.46 lx	0.7m
143.38 lx	1.0m
80.40 lx	1.3m
51.59 lx	1.7m
35.51 lx	2.0m

2700K

Ver. Spread: 148.1° Horiz. Spread: 116.3°



120°

LED	Lumens	Watts	Efficacy
WHITE	745.32	12.00	62.11

CenterBeamLux	Illuminance at Distance
1423.08 lx	0.3m
355.77 lx	0.7m
158.12 lx	1.0m
88.44 lx	1.3m
56.28 lx	1.7m
39.50 lx	2.0m

3000K

Ver. Spread: 149.0° Horiz. Spread: 116.7°