


TUBE MAX

IP66 **PIXEL**

The unique optical PMMA diffuser offers shadowless and smooth mixing color,
The wide cover brings eye-catching effect,
Rapid easy installation is achieved with the built in power supply and quick plug connectors,
The connection can be extended up to 38 meters.

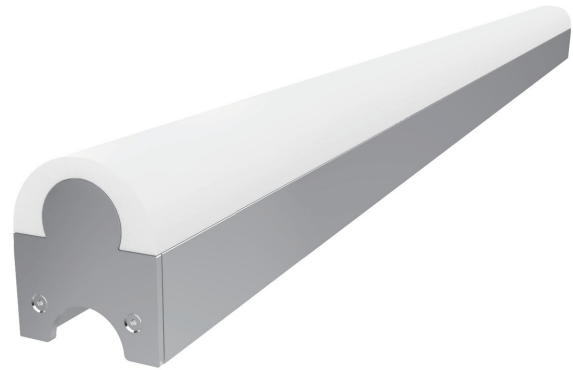

RGBW



RDM



Dimmable



Extreme Environments



IP66



AC-IN



Easy Installation


SPECIFICATION

MODEL	‣ TUBE MAX
OPERATING VOLTAGE	‣ AC 100–240V
POWER CONSUMPTION	‣ 8W/305mm, 32W/1220mm
LED TYPE	‣ SMD
COLOR RANGE	‣ 2700K,3000K,4000K,5000K,Tunable White,RGB,RGBW
PIXEL	‣ 8 Pixels/16 Pixels/1220mm
CRI	‣ 80min
SYSTEM EFFICIENCY	‣ 38lm/W@3000K
FWHM	‣ 150°
MATERIAL	‣ Aluminum + PMMA Cover
OPERATING TEMPERATURE	‣ -20°C ~ +55°C
STORAGE TEMPERATURE	‣ -25°C ~ +60°C
LIFE TIME	‣ 50,000 hours/L70 at 25°C
CONNECTION	‣ Quick-Plug
DIMENSIONS	‣ 1220(L)*55(W)*95(H)mm, 305/610/1000mm available
CABLE LENGTH	‣ 150mm
WATER PROOF	‣ IP66
CONTROL	‣ DMX/RDM
LIST	‣ CE

ORDER CODE	MODEL	LENGTH	PIXEL	POWER	CCT	CRI	OPTICS	VOLTAGE	CONTROL	COVER
EXAMPLE	TUBE MAX	- 1220	- 16	- 32	- RGBW	- N/A	- 150	- 220	- DMX	- MILKY

DIMENSIONS

Unit: mm

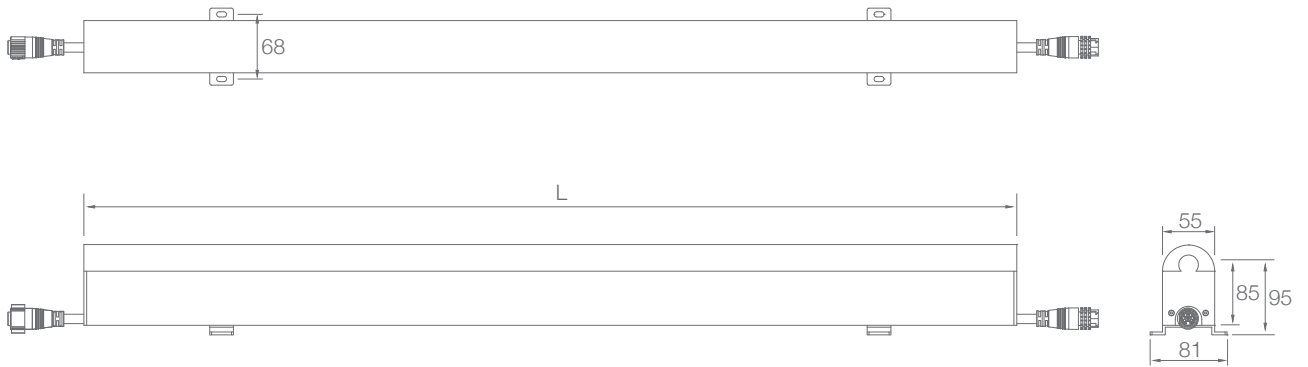


Leader Cable



Jumper Cable



OPTIC SELECTION



LED	Lumens	Watts	Efficacy
RGBW	918.40	32.00	28.70
R	137.80	5.74	24.00
G	263.69	8.44	31.24
B	42.14	7.92	5.32
W	339.62	8.90	38.16

CenterBeamLux	Illuminance at Distance
329.81 lx	0.8m
82.46 lx	1.7m
36.64 lx	2.5m
20.60 lx	3.3m
13.20 lx	4.2m
9.14 lx	5.0m

■ Ver. Spread: 164.6° ■ Horiz. Spread: 118.0°

