


PIXEL BOARD

IP20 **PIXEL**

3 in 1 LED offers a fusion of well blended colors,
Flexible installation is included with various
cover material options,
The compact dimension brings unlimited
patter possibilities,
The pixel board also contains flicker free illumination
designed for video resolution and display.

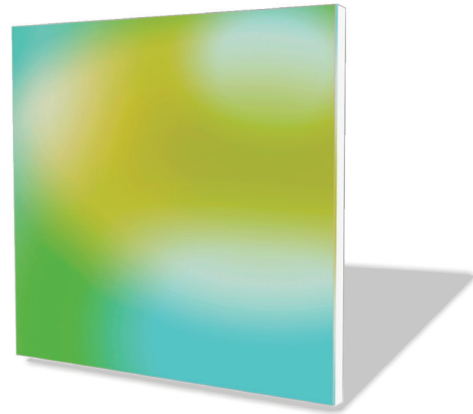

RGBW

11000111
00111111
01101000
01011111
10100000

Dynamic
Control



Dimmable



Easy
Installation



IP20




SPECIFICATION

MODEL	▶ PIXEL BOARD
OPERATING VOLTAGE	▶ 24V DC
POWER CONSUMPTION	▶ 6.25W/25Pixels, 16W/64Pixels
LED TYPE	▶ SMD
COLOR RANGE	▶ (24bit)2700K,3000K,4000K,5000K,RGB,RGBW
CRI	▶ 90min, 80min
PIXEL	▶ 25 Pixels/unit, 64 Pixels/unit, Max spacing 250mm
FWHM	▶ 120°
MATERIAL	▶ Aluminum
OPERATING TEMPERATURE	▶ -10°C ~ +40°C
STORAGE TEMPERATURE	▶ -25°C ~ +60°C
LIFE TIME	▶ 50,000 hours/L70 at 25 °C
CONNECTION	▶ Quick-Plug
DIMENSIONS	▶ 175(L)*175(W)*10(H)mm@25pixels 250(L)*250(W)*10(H)mm@64pixels
WATER PROOF	▶ IP20
CONTROL	▶ ON/OFF, DALI, DMX(Auto Addressing), 0-10V Dim
LIST	▶ CE

ORDER CODE	MODEL	UNIT	PIXEL	POWER	CCT	SPACING	OPTICS	VOLTAGE	CONTROL	COVER
EXAMPLE	PIXEL BOARD	- 1	- 25	- 6.25	- RGB	- 250	- 120	- 24	- DMX	

DIMENSIONS

Unit: mm

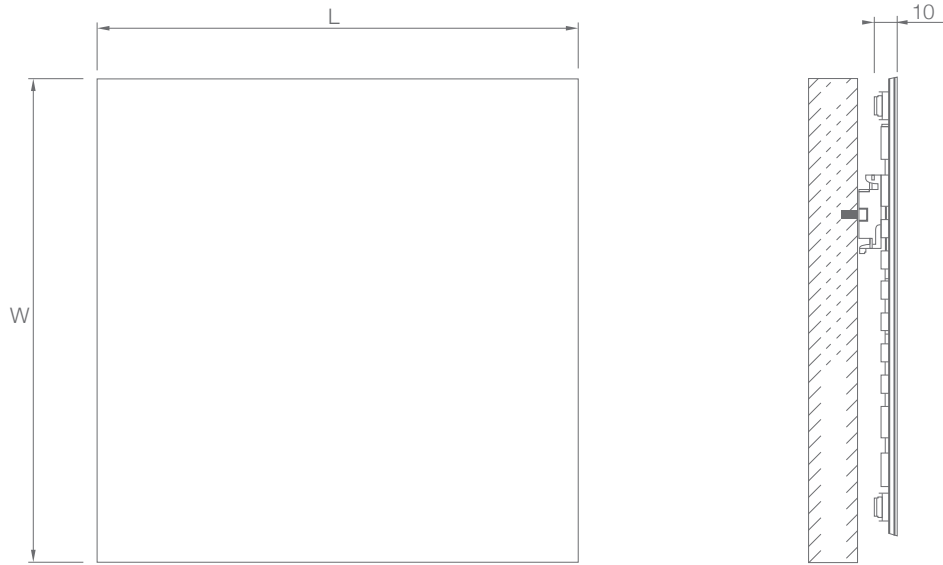

WIRING

