

# INGROUND GRAZE 80

IP67 **LANDSCAPE**

Sophisticated designed anti-glare structure provides linear inground wall grazing perfectly,  
IP patented fixture offers consistent light without hazardous glare,  
Robust walk over design for inground installation.



RGBW



Easy Installation



Dimmable



Extreme Environments



Adjustable



IP67


## SPECIFICATION

MODEL	› INGROUND GRAZE 80
OPERATING VOLTAGE	› 24V DC
POWER CONSUMPTION	› 32W/1000mm
LED TYPE	› SMD
COLOR RANGE	› 2700K,3000K,4000K,5000K,Tunable White,RGB,RGBW
CRI	› 90min, 80min
SYSTEM EFFICIENCY	› 55lm/W@3000K
FWHM	› Integrated lens: 20°*90°, 40°*90°, 60°*90°
MATERIAL	› Aluminum + Tempered Glass + Stainless Steel
PROTECTION	› IK10
OPERATING TEMPERATURE	› -20°C ~ +55°C
STORAGE TEMPERATURE	› -25°C ~ +60°C
LIFE TIME	› 50,000 hours/L70 at 25°C
CONNECTION	› Quick-Plug
DIMENSIONS	› 1000(L)*80(W)*110(H)mm, 300/600/1200mm ETO available
CABLE LENGTH	› 300mm
WATER PROOF	› IP67
CONTROL	› ON/OFF, DMX (Remote), 0-10V Dim
LIST	› CE

ORDER CODE	MODEL	LENGTH	POWER	CCT	CRI	OPTICS	VOLTAGE	CONTROL	ACC
EXAMPLE	INGROUND GRAZE 80	- 1000	- 32	- 3000K	- 80	- 2090	- 24	- ON/OFF	

## DIMENSIONS

Unit: mm

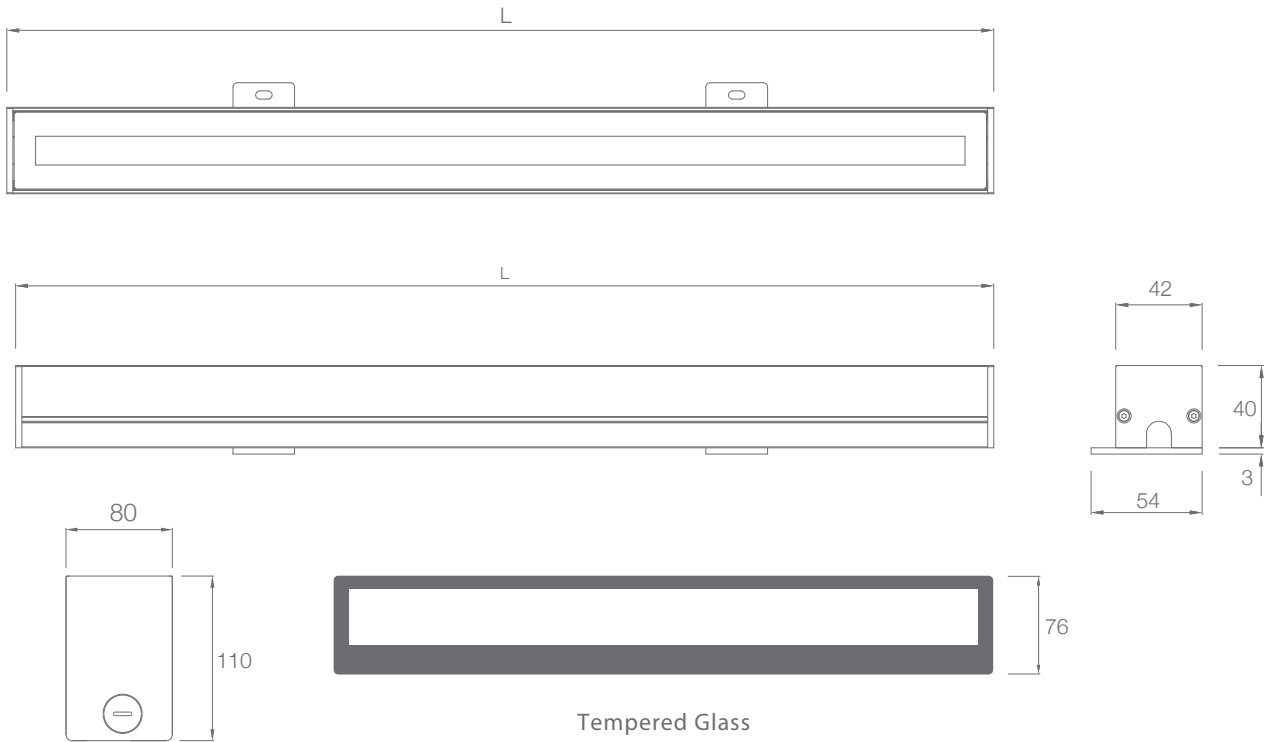

Pre installation Kit  
Stainless Steel

Tempered Glass

## OPTIC SELECTION



20°X90°

LED	Lumens	Watts	Efficacy
WHITE	1632.00	32.00	51.00

CenterBeamLux	Illuminance at Distance
3387.97 lx	0.8m
845.88 lx	1.7m
373.50 lx	2.5m
218.97 lx	3.3m
143.74 lx	4.2m
95.87 lx	5.0m

2700K

■ Ver. Spread: 20.0° ■ Horiz. Spread: 90.5°



20°X90°

LED	Lumens	Watts	Efficacy
WHITE	1760.00	32.00	55.00

CenterBeamLux	Illuminance at Distance
4119.46 lx	0.8m
1029.97 lx	1.7m
456.54 lx	2.5m
257.46 lx	3.3m
164.26 lx	4.2m
114.13 lx	5.0m

3000K

■ Ver. Spread: 20.0° ■ Horiz. Spread: 90.5°