


FOUNTAIN STRIP PLUS

IP68 **LANDSCAPE**

Ultra flexible body designed for any curve or shape,
The high quality diffuser creates smooth light for direct view with high CRI>90,
Various length versions are available upon request,
The system provides seamless continuous connection for lighting.

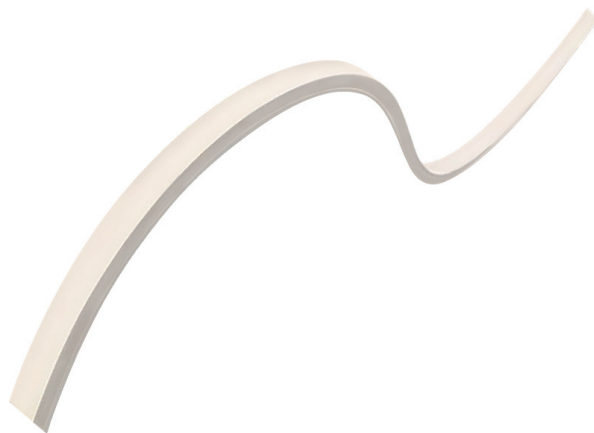

RGBW



Diffused




Dimmable



IP68



Easy Installation

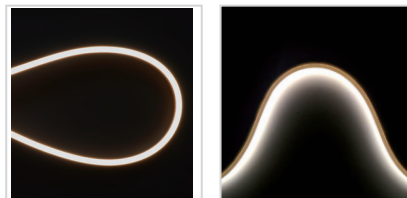


SPECIFICATION

MODEL	‣ FOUNTAIN STRIP PLUS
OPERATING VOLTAGE	‣ 24V DC
POWER CONSUMPTION	‣ 6W/meter, 9.6W/meter, 14.4W/meter
LED TYPE	‣ SMD
COLOR RANGE	‣ 2400K,2700K,3000K,4000K,5000K,Tunable White,RGB,RGBW
CRI	‣ 90min, 80min
SYSTEM EFFICIENCY	‣ 63lm/W@3000K
FWHM	‣ 120°
MATERIAL	‣ ECO PVC
OPERATING TEMPERATURE	‣ -20°C ~ +55°C
STORAGE TEMPERATURE	‣ -25°C ~ +60°C
LIFE TIME	‣ 50,000 hours/L70 at 25°C
CONNECTION	‣ Quick-Plug
DIMENSIONS	‣ 1000(L)*16.5(W)*16.5(H)mm, Max 10meters, ETO length available
CABLE LENGTH	‣ 3000mm
WATER PROOF	‣ IP68
SUBMERSIBLE DEPTH	‣ 2000mm Max
CONTROL	‣ ON/OFF, DMX (Remote), 0-10V Dim
LIST	‣ CE


ORDER CODE	MODEL	LENGTH	PIXEL	POWER	CCT	CRI	OPTICS	VOLTAGE	CONTROL	COVER
EXAMPLE	FOUNTAIN STRIP PLUS	- 1000 - /	-	14.4	- RGBW	-N/A-	120	- 24	- DMX	- MILKY

DIMENSIONS


Unit: mm

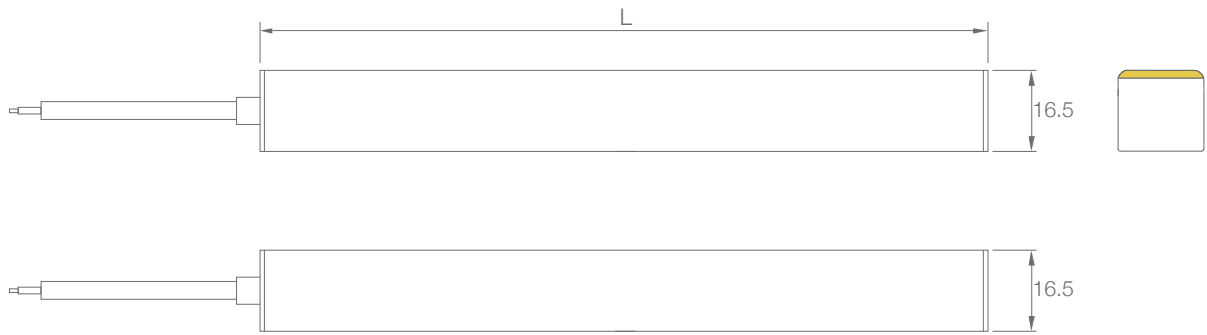

Cable From Side




Cable From Bottom




Cable From End






Mounting Track (SSL)




Mounting Clip(SSL)



Flex Mounting Track(SSL)



Top Bended
R ≥ 60mm




Side Bended
R ≥ 60mm

OPTIC SELECTION



120°

LED	Lumens	Watts	Efficacy
WHITE	336.76	5.50	63.14

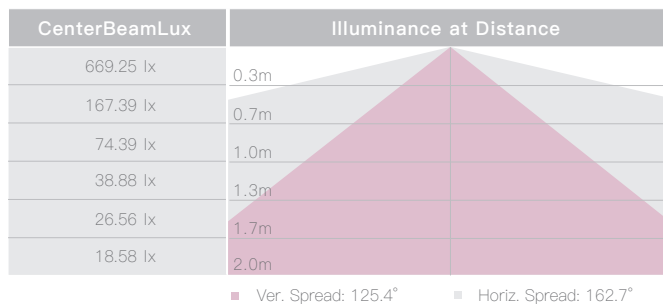

3000K



120°

LED	Lumens	Watts	Efficacy
WHITE	595.00	9.60	61.97

