

FLEX MILKY SLIM MINI SIDE BENDED

IP67 **STRIP**

- Ultra flexible body designed for any curve or shape,
- The high quality diffuser creates smooth light for direct view with high CRI>90,
- Various length versions are available upon request,
- The system provides seamless continuous connection for lighting.



Dimmable



Diffused



IP67



Easy Installation




SPECIFICATION

MODEL	› FLEX MILKY SLIM MINI SIDE BENDED
OPERATING VOLTAGE	› 24V DC
POWER CONSUMPTION	› 2W/meter, 3W/meter, 6W/meter
LED TYPE	› SMD
COLOR RANGE	› 2700K,3000K,4000K,5000K
CRI	› 90min, 80min
SYSTEM EFFICIENCY	› 40lm/W@3000K
FWHM	› 110°
MATERIAL	› SILICONE
OPERATING TEMPERATURE	› -20°C ~ +55°C
STORAGE TEMPERATURE	› -25°C ~ +60°C
LIFE TIME	› 50,000 hours/L70 at 25°C
CONNECTION	› Quick-Plug
DIMENSIONS	› 1000(L)*4(W)*8(H)mm, Max 5meters, ETO length available
CABLE LENGTH	› 300mm
WATER PROOF	› IP67
CONTROL	› ON/OFF, DMX (Remote), 0-10V Dim
LIST	› CE


ORDER CODE	MODEL	LENGTH	POWER	CCT	CRI	OPTICS	VOLTAGE	CONTROL	ACC
EXAMPLE	FLEX MILKY SLIM MINI SIDE BENDED	- 1000	- 6	- 3000K	- 90	- 110	- 24	- ON/OFF	

DIMENSIONS


Unit: mm

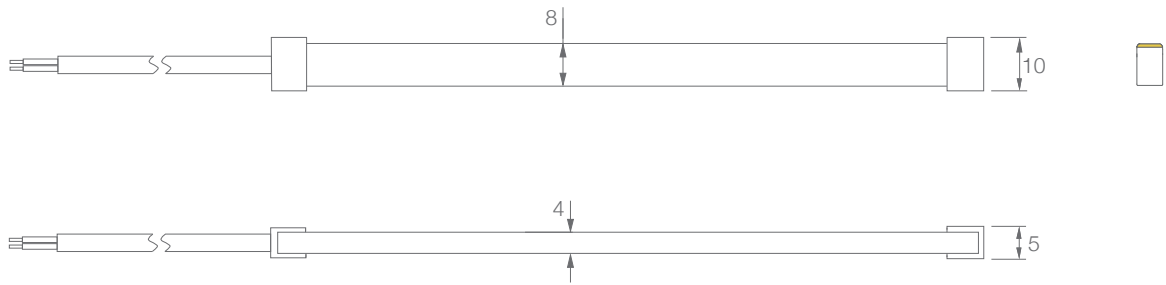



Mounting Track



Mounting Clip



Flex Mounting Track(SSL)

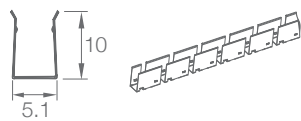


OPTIC SELECTION




110°

LED	Lumens	Watts	Efficacy
WHITE	196.15	5.00	39.23

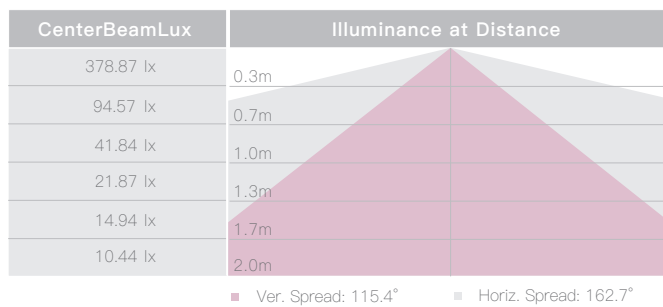

110°

LED	Lumens	Watts	Efficacy
WHITE	126.35	3.10	40.76

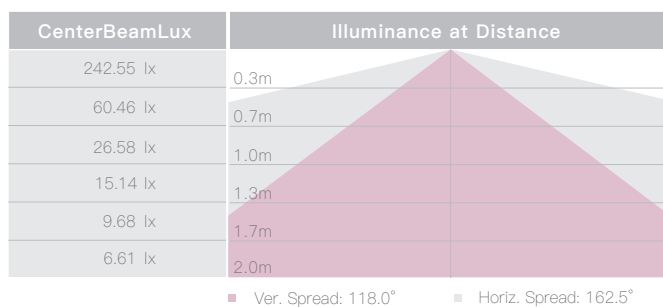

3000K