

FLEX MILKY SLIM MINI TOP BENDED

IP67 **STRIP**

Ultra flexible body designed for any curve or shape,
The high quality diffuser creates smooth light for direct view with high CRI>90,
Various length versions are available upon request,
The system provides seamless continuous connection for lighting.



Dimmable




Diffused



IP67



Easy Installation




SPECIFICATION

MODEL	› FLEX MILKY SLIM MINI TOP BENDED
OPERATING VOLTAGE	› 24V DC
POWER CONSUMPTION	› 2W/meter, 3W/meter, 6W/meter
LED TYPE	› SMD
COLOR RANGE	› 2700K,3000K,4000K,5000K
CRI	› 90min, 80min
SYSTEM EFFICIENCY	› 44lm/W@3000K
FWHM	› 110°
MATERIAL	› SILICONE
OPERATING TEMPERATURE	› -20°C ~ +55°C
STORAGE TEMPERATURE	› -25°C ~ +60°C
LIFE TIME	› 50,000 hours/L70 at 25°C
CONNECTION	› Quick-Plug
DIMENSIONS	› 1000(L)*6(W)*6(H)mm, Max 5meters, ETO length available
CABLE LENGTH	› 300mm
WATER PROOF	› IP67
CONTROL	› ON/OFF, DMX (Remote), 0-10V Dim
LIST	› CE


ORDER CODE	MODEL	LENGTH	POWER	CCT	CRI	OPTICS	VOLTAGE	CONTROL	ACC
EXAMPLE	FLEX MILKY SLIM MINI TOP BENDED	- 1000	- 6	- 3000K	- 90	- 120	- 24	- ON/OFF	

DIMENSIONS


Unit: mm

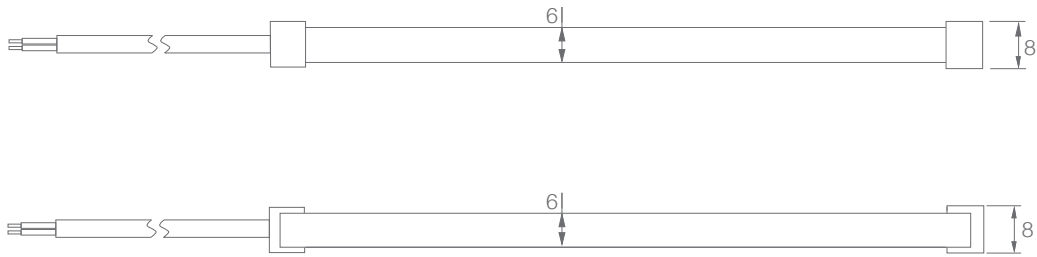

Cable From Side




Cable From Bottom





Cable From End



Mounting Track



Mounting Clip




OPTIC SELECTION




110°

LED	Lumens	Watts	Efficacy
WHITE	252.78	6.00	42.13

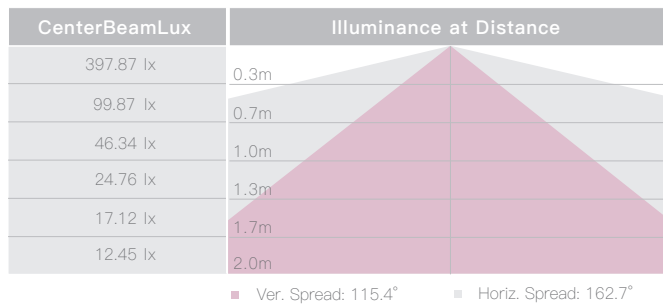

110°

LED	Lumens	Watts	Efficacy
WHITE	138.81	3.10	44.78

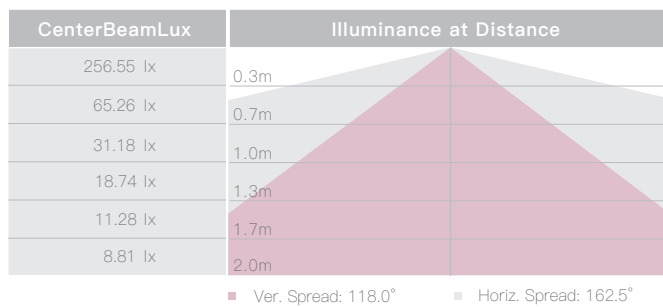

3000K