


FLEX MILKY SLIM SIDE BENDED

IP67 **STRIP**

Ultra flexible body designed for any curve or shape,
 The high quality diffuser creates smooth light for direct view with high CRI>90,
 Various length versions are available upon request,
 The system provides seamless continuous connection for lighting.

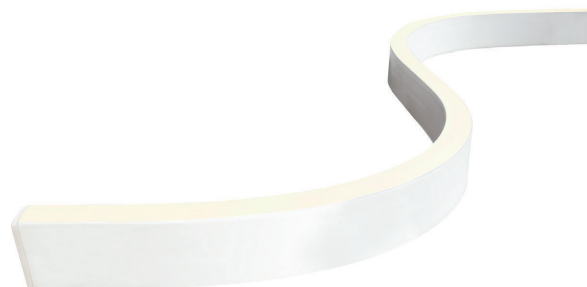

RGBW



Diffused



Dimmable



IP67



Easy Installation




SPECIFICATION

MODEL	‣ FLEX MILKY SLIM SIDE BENDED
OPERATING VOLTAGE	‣ 24V DC
POWER CONSUMPTION	‣ 6W/meter, 9.6W/meter, 12W/meter
LED TYPE	‣ SMD
COLOR RANGE	‣ 2400K,2700K,3000K,4000K,5000K,Tunable White,RGB,RGBW
CRI	‣ 90min, 80min
SYSTEM EFFICIENCY	‣ 61.23lm/W@3000K
FWHM	‣ 120°
MATERIAL	‣ SILICONE
OPERATING TEMPERATURE	‣ -20°C ~ +55°C
STORAGE TEMPERATURE	‣ -25°C ~ +60°C
LIFE TIME	‣ 50,000 hours/L70 at 25°C
CONNECTION	‣ Quick-Plug
DIMENSIONS	‣ 1000(L)*12(W)*21(H)mm, Max 5meters, ETO length available
CABLE LENGTH	‣ 600mm
WATER PROOF	‣ IP67
CONTROL	‣ ON/OFF, DMX (Remote), 0-10V Dim
LIST	‣ CE


ORDER CODE	MODEL	LENGTH	POWER	CCT	CRI	OPTICS	VOLTAGE	CONTROL	ACC
EXAMPLE	FLEX MILKY SLIM SIDE BENDED	- 1000	- 9.6	- 3000K	- 90	- 120	- 24	- ON/OFF	

DIMENSIONS


Unit: mm

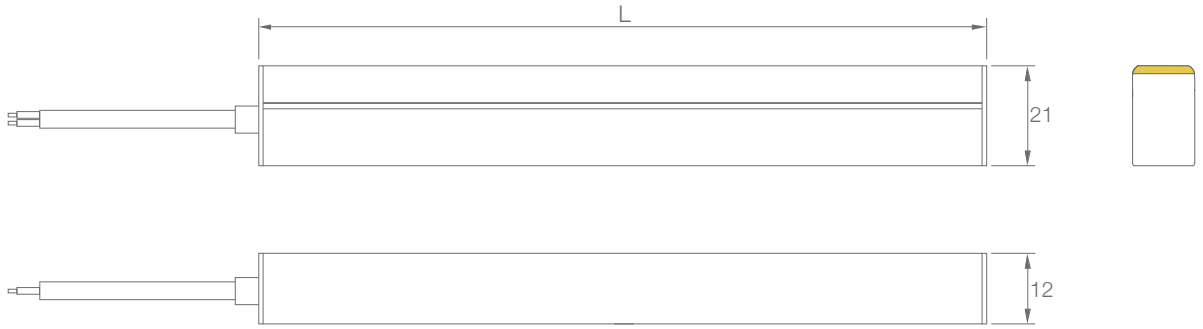

Cable From Side




Cable From Bottom




Cable From End





Mounting Track



Mounting Clip



Flex Mounting Track(SSL)

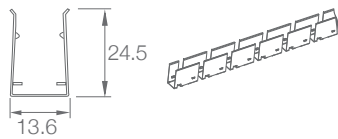

OPTIC SELECTION



120°

LED	Lumens	Watts	Efficacy
WHITE	336.76	5.50	61.23

CenterBeamLux	Illuminance at Distance
649.26 lx	0.3m
162.33 lx	0.7m
72.14 lx	1.0m
37.71 lx	1.3m
25.76 lx	1.7m
18.02 lx	2.0m

■ Ver. Spread: 125,4° ■ Horiz. Spread: 162,7°



120°

LED	Lumens	Watts	Efficacy
WHITE	535.29	9.60	55.76

CenterBeamLux	Illuminance at Distance
1027.68 lx	0.3m
256.91 lx	0.7m
113.58 lx	1.0m
64.04 lx	1.3m
41.08 lx	1.7m
28.53 lx	2.0m

■ Ver. Spread: 128,0° ■ Horiz. Spread: 162,5°

3000K